


SWC 32




A to Z
SPARE SUPPORT

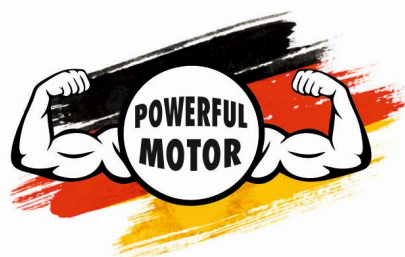

SPECIFICATIONS

Motor power	1100 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø35 mm
Broach cutter(50 mm length)	Ø12 mm - Ø35 mm
RPM	450 min-1
Weight	10 kg (22.0 lbs)
Magnet power	10000 N
Input supply voltage	220V-240V
Frequency	50Hz-60Hz




STANDARD ACCESSORIES






SPECIFICATIONS

Motor power	1350 watt
Spindle	MT2, 19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø50mm
Broach cutter(50 mm length)	Ø12 mm - Ø50 mm
Twist Drill	Upto Ø18 mm
RPM	n250 min ⁻¹ -n450 min ⁻¹
Weight	12 kg (26,8 lbs)
Magnet power	11000 N
Input supply voltage	220v-240v
Frequency	50Hz-60Hz




STANDARD ACCESSORIES

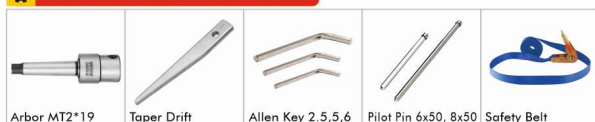

SWC 40



A to Z
SPARE SUPPORT

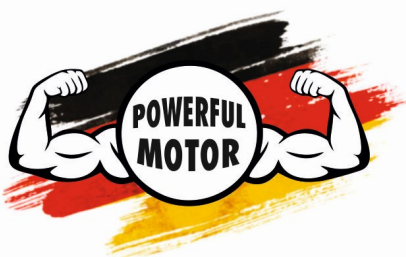


Twist Drilling Ø13 mm





SPECIFICATIONS

Motor power	1150 watt
Spindle	19 mm (3/4") Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø40 mm
Broach cutter (50 mm length)	Ø12 mm - Ø40 mm
Broach cutter (80 mm length)	Ø18 mm - Ø22 mm
Broach cutter (100 mm length)	-
Tapping	-
Twist drill	Upto Ø13 mm
Counter Sinking	Ø40 mm
RPM	450 min ⁻¹
Flexible Stroke upto	240 mm
Weight	12 kg (26,8 lbs)
Magnet power	10000 N
Input supply voltage	220V - 240V



STANDARD ACCESSORIES

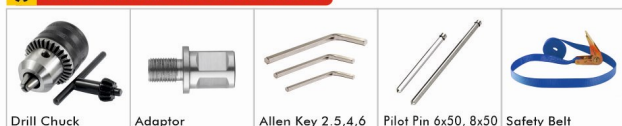

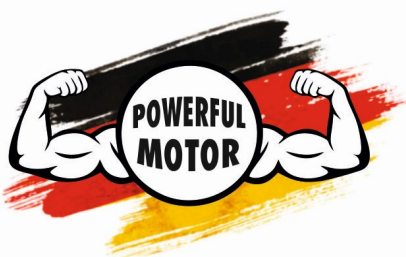


Twist Drilling Ø23 mm





SPECIFICATIONS

Motor power	1600 watt
Spindle	MT3, 19 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø65 mm
Broach cutter(50 mm length)	Ø12 mm - Ø65 mm
Broach cutter (80 mm length)	Ø12 mm - Ø65 mm
Broach cutter (100 mm length)	-
Twist drill	Ø23 mm
Counter Sinking	Ø65 mm
RPM	250 min ⁻¹ /450 min ⁻¹
Flexible Stroke upto	205 mm
Weight	16 kg (59.5 lbs)
Magnet power	18000 N
Input supply voltage	220V - 240V
Frequency	50Hz-60Hz



STANDARD ACCESSORIES

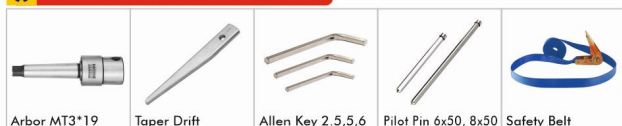

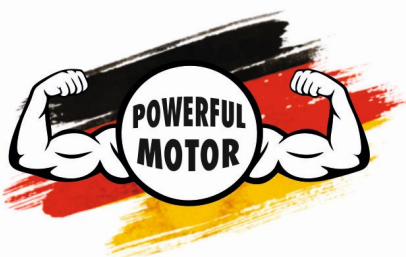


A to Z
SPARE SUPPORT




Twist Drilling Ø32 mm


SPECIFICATIONS

Motor power	1700 watt
Spindle 1	MT3, 19 mm Weldon
Spindle 2	MT3, 32 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø80 mm
Broach cutter(50 mm length)	Ø12 mm - Ø80 mm
Broach cutter (80 mm length)	Ø18 mm - Ø80 mm
Tapping	-
Twist drill	Ø32mm
Counter Sinking	Ø100 mm
RPM	n 110 min ⁻¹ - n 175 min ⁻¹ / n 385 min ⁻¹ - n 425 min ⁻¹
Weight	21 kg
Magnet power	18000 N
Input supply voltage	220V - 240V
Frequency	50Hz-60Hz



STANDARD ACCESSORIES

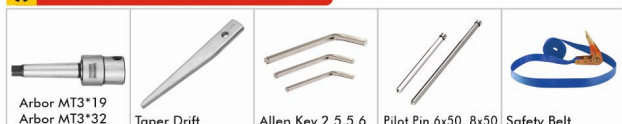

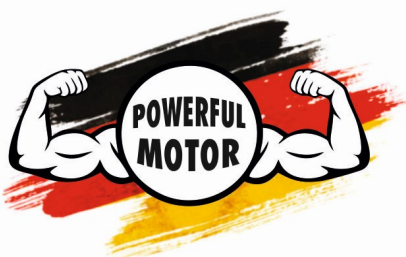


Twist Drilling Ø32 mm





SPECIFICATIONS

Motor power	1800 watt
Spindle 1	MT3, 19 mm Weldon
Spindle 2	MT3, 32 mm Weldon
Broach cutter (35 mm length)	Ø12 mm - Ø100 mm
Broach cutter(50 mm length)	Ø12 mm - Ø100 mm
Broach cutter (80 mm length)	Ø18 mm - Ø100 mm
Broach cutter (100 mm length)	Ø18 mm - Ø100 mm
Tapping	-
Twist drill	Ø32mm
Counter Sinking	Ø80 mm
RPM	n 40 min ⁻¹ - n 65 min ⁻¹ / n 140 min ⁻¹ - n 220 min ⁻¹
Weight	28 kg
Magnet power	20000 N
Input supply voltage	220V - 240V
Frequency	50Hz-60Hz



STANDARD ACCESSORIES

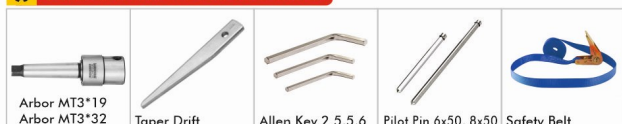

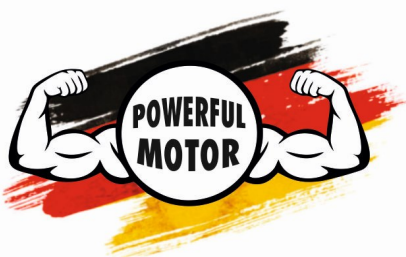

Tapping M6-M38




Twist Drilling Ø45 mm

A to Z
SPARE SUPPORT



SPECIFICATIONS

Motor power	2500 watt
Spindle	MK-4
Broach cutter (35 mm length)	Ø12 mm - Ø120 mm
Broach cutter (50 mm length)	Ø12 mm - Ø120 mm
Broach cutter (80/100 mm length)	Ø18 mm - Ø120 mm
Twist drill	Ø45 mm
Counter Sinking	Ø80 mm
Tapping	M6-M38
Reaming	Ø50 mm
Counter sinking	Ø80 mm
RPM	80-125min ⁻¹ / 175-300 min ⁻¹
Weight	35 kg
Magnet power	25000 N
Input supply voltage /Frequency	220V-240V / 50Hz-60Hz
Electro Torque Control	Yes



STANDARD ACCESSORIES

